

MULTI JET FUSION

PA11 VAPOUR SMOOTH BLACK

[Supplier Data Sheet: HP 3D High Reusability PA11](#)




PRODUCT DESCRIPTION

PA11 Vapour Smooth Black provides excellent ductility and temperature resistance without sacrificing tensile strength. It offers one of the highest elongation break thresholds in the nylon family.

APPLICATIONS

The material is suited for functional, moving parts with features like snap fits and living hinges. Its black colour makes it desirable for optical applications due to low reflectivity.

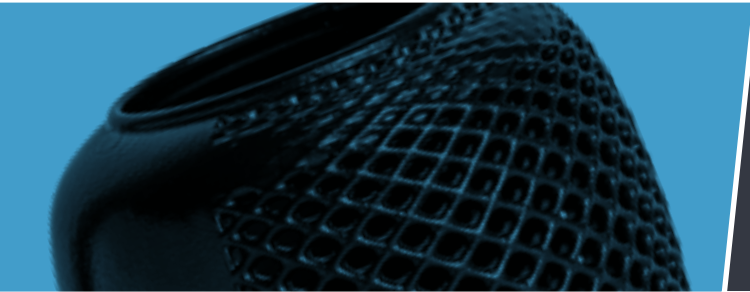

KEY PRODUCT BENEFITS

- High elongation at break
- Flexibility
- Uniform black colour

PROPERTIES

PROPERTY	TEST METHOD	VALUE
Colour	-	Black / Anthracite (shiny)
Sintered Density*	ASTM D792	1.03 g/cm ³
Surface Roughness**	DIN EN ISO 4287	Ra = 5-10 µm; Rz = 20-45 µm
Water absorption, 20 °C, 50 % Relative Humidity	DIN EN ISO 62	0.3 ± 0.2%
Water absorption, 24 hrs. in boiling water		1.5 ± 0.2%
E-Module (x-y plane)	DIN EN ISO 527, test speed 10mm/min	1800 ± 200 MPa
E-Module (z plane)		1800 ± 200 MPa
Tensile strength (x-y plane)		52 ± 4 MPa
Tensile strength (z plane)		49 ± 4 MPa
Elongation at break (x-y plane)		50% ± 10%
Elongation at break (z plane)		35 +/- 5%
Heat deflection temperature @ 0.46 MPa*	DIN EN ISO 75	188 °C
Heat deflection temperature @ 1.82 MPa*		48 °C

*From supplier data sheet

**Surface roughness may vary depending on orientation

TOLERANCES

For well-designed parts, tolerances of ± 0.20mm plus 0.002mm/mm can typically be achieved. Note that tolerances may change depending on part geometry

Version 1.0 | March 2023